


Ecoroof Hexagonal

General description: coloured asphalt shingle with thermoadhesives tabs

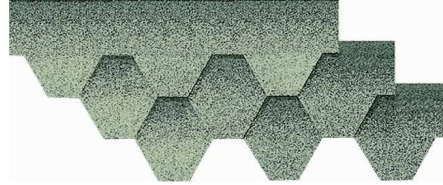

bituminous compound	-		Blown bitumen	
length	EN 544	mm	1000	+/-3
width	EN 544	mm	337	+/-3
thickness	-	mm	3	+/-10%
exposed area	-	mm	143	-

Physical-chemical properties

weight	-	kg/m ²	8.3	+/-10%
mass of the fibreglass mat	-	g/m ²	100	+/-10%
bitumen single layer	EN 544	g/m ²	>1300	-
granules single layer	EN 544	g/m ²	>1200	-
mechanical resistance MD/CMD	EN 544	N/ 5 cm	>700/450	-
nail resistance	EN 544	N	>100	-
granules adhesion	EN 544	-g	<1,5	-
minimum adhesion temperature for tabs		°C	60	

Fire behaviour

classification according	EN 13501-5	B roof (t1)
classification according	EN 13501-1	E

Wrapping

type	polyethylene
shingles for bundle	21
m ² /bundle	3
m ² /pallet	180

TeMa North America llc
395 Steeley Way - Kearneysville WV 25430 U.S.A.
Phone (304) 724 0200
e-mail: info@temanorthamerica.com
www.temanorthamerica.com



Rev. 3 - 29/08/19 674 i