


Prestige Compact

General description: asphalt shingle with copper

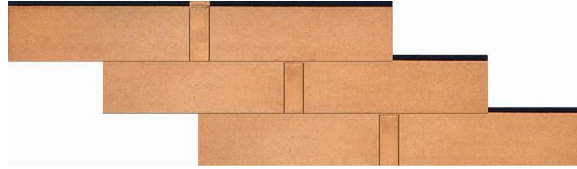

bituminous compound	-		Blown bitumen	
length	EN 544	mm	1000	+/-3
width	EN 544	mm	340	+/-3
thickness	-	mm	4.7	+/-10%
exposed area	-	mm	290	-
copper thickness	-	µm	70	+/-3

Physical-chemical properties

weight	-	kg/m ²	8.28	+/-8%
mass of the fibreglass mat	-	g/m ²	2*80	+/-10%
bitumen single layer	EN 544	g/m ²	>3000	-
mechanical resistance MD/CMD	EN 544	N/ 5 cm	1500/1500	+/-15%
nail resistance	EN 544	N	>200	-
peeling	EN 544	N/cm	>5	-

Fire behaviour

classification according	EN 13501-5	B roof (t1)
classification according	EN 13501-1	C s2 d0

Wrapping

type	cartboard
shingles for bundle	14
m ² /bundle	4,06
m ² /pallet	194.88

TeMa North America llc
395 Steeley Way - Kearneysville WV 25430 U.S.A.
Phone (304) 724 0200
e-mail: info@temanorthamerica.com
www.temanorthamerica.com



Rev. 1 - 23/02/10 620 i