


## AQUA ROLL

**MATERIAL:** SELF-ADHESIVE BITUMINOUS MEMBRANE 2 mm THICK, REINFORCED WITH A GLASS NET. THE LOWER FACE IS PROTECTED BY A 800 mm THICK CENTRAL BAND OF POLYPROPYLENE NET AND AT THE SIDES BY 2 BANDS OF SILICONATE WIRE TO BE LEADED FOR LAYING. ON THE UPPER FACE IN THE CENTRE, THERE IS A COPPER VIEW SELF-PROTECTION BAND (INDUSTRIAL TAPE 99.4 % Cu WITH ANNEALED Zn HV 50 ) OF 70 µm. EVERYTHING IS COVERED BY A 1000mm THICK SILICONATE FILM, CENTRALLY DIVIDED FOR THE WHOLE LENGTH OF THE ROLL.

**PACKAGING:** 5 m LONG ROLLS WITH ROLL HEIGHT OF 100 cm

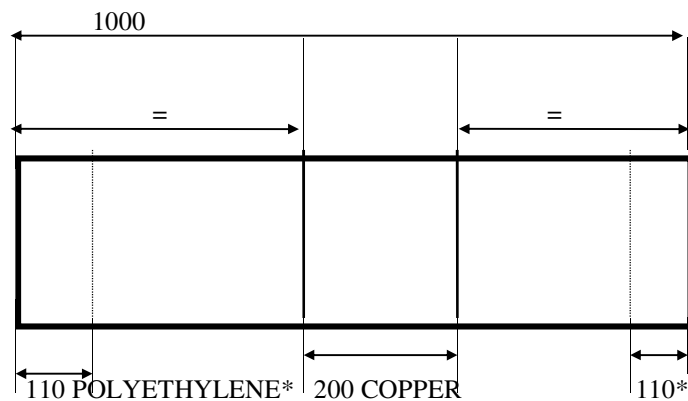

### TECHICAL PROPERTIES

- **OVERALL WEIGHT:** 2.1 kg./m<sup>2</sup>
- **OPERATIONAL TEMPERATURE:** -25°C + 90°C (-13 °F 194°F)
- **THICKNESS OF THE COPPER FILM:** 0.07 mm (0.0028 in)
- **THICKNESS OF BITUMINOUS COMPOUND:** 1.90 mm (0.075 in)
- **THICKNESS OF THE SILICONATE FILM (TO BE REMOVED):** 0.04 mm (0.00157 in)
- **OVERALL THICKNESS:** 2 mm (5/64 in)